


MISURE ESPRESSE IN MILLIMETRI
ALL DIMENSION ARE IN mm

Rev.	Data: Date:	Nome: Name:	Descrizione della modifica Modification description
			SAMPLE

MATERIAL SPECIFICATION	
SENSOR NTC	R25=10K±1% B(25/85)=3977±1%
NEEDLE CABLE	AISI 304 SUITABLE FOR FOOD CONTACT BLACK THERMOPLASTIC RUBBER 2X 0.25 mmq
HANDLE	BLACK TPE HANDGRIP SUITABLE FOR FOOD CONTACT (F.D.A. CERTIFICATED)
FILLING	RESIN
TERMINAL	NONE- WIRE STRIPPED

TECHNICAL SPECIFICATIONS	
WORKING TEMPERATURE	-50°C +110°C
PROTECTION DEGREE	IP67
INSULATION VOLTAGE	>100MΩ @500V
DIELECTRIC STRENGTH	1500Vac 1"
THERMAL TIME COSTANT	MAX VALUE 10"

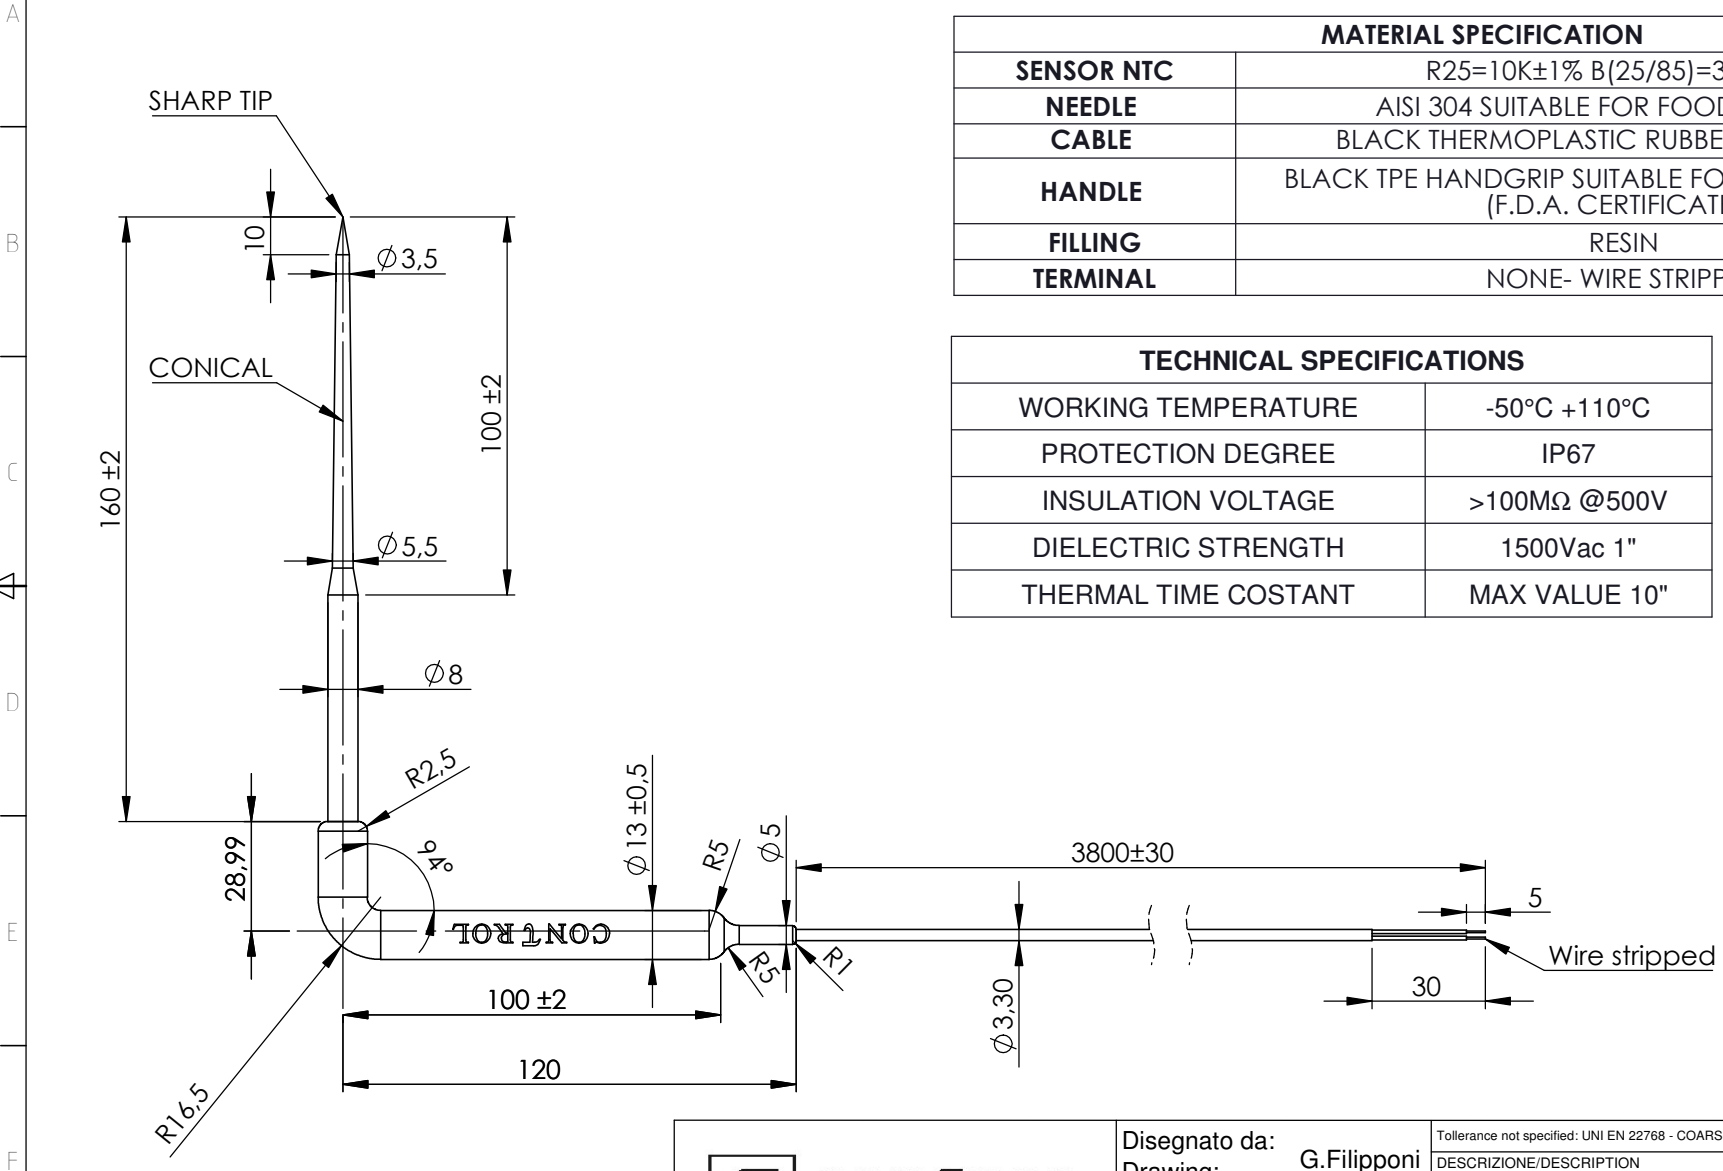

Disegnato da:
Drawing: G.Filipponi

Approvato da:
Approved: G.Buzzi

Tolerance not specified: UNI EN 22768 - COARSE	Date: 13/11/14	Scale: 2:1	
DESCRIZIONE/DESCRIPTION PROBE FROZEN MEAT 10K 1% B25/85= 3977 1%			
CODICE CONTROL/CONTROL CODE	REV	CODICE CLIENTE/CUSTOMER CODE	